MOEN®

Specifications



- Various finishes identified by suffix
- Handshower with Magnetix[™] docking
- Metal shower ball
- \cdot 72" double interlock (metal) spiral hose
- $\boldsymbol{\cdot}$ Assembled with two check valves for backflow prevention

• Adjustable cradle

OPERATION

- 4 unique showering experiences
- · Cradle rotates to adjust angle of handshower

FLOW

- \cdot Designed to deliver 1.5 gpm (5.7 L/min) max at 80 psi and
- 1.2 gpm (4.5 L/min) max at 80 psi super saver mode

STANDARDS

• Third party certified at WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




Nebia by Moen[™] Quattro

Handshower with Cradle and Hose

MODELS: N400H0 Series



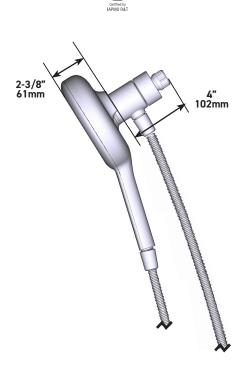

CRITICAL DIMENSIONS DO NOT SCALE

SPC21286 5000047519

36/26/2021 5 Scheed 00