

Two-Way Diverter Valve with Off

FEATURES

- Corrosion resistant
- 1/2" NPT connections
- Ceramic disk valve cartridge
- 2 outlets with off position

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION



The two-way diverter valve with off shall have 1/2" NPT connections. Product shall be TOTO Model TSMV. Required two-way diverter trim with off sold separately.

SPECIFICATIONS

- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Brass
- Shipping Weight: 1.8 lbs.
- Shipping Dimensions: 6" L x 3-3/8" W x 3" W

INSTALLATION NOTES

TRIM REQUIRED:
Two-way diverter trim with off sold separately.

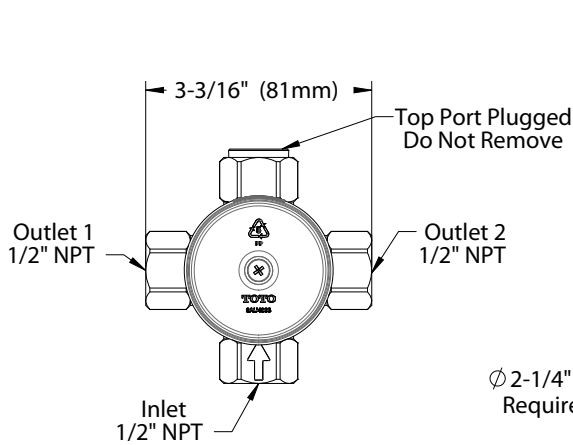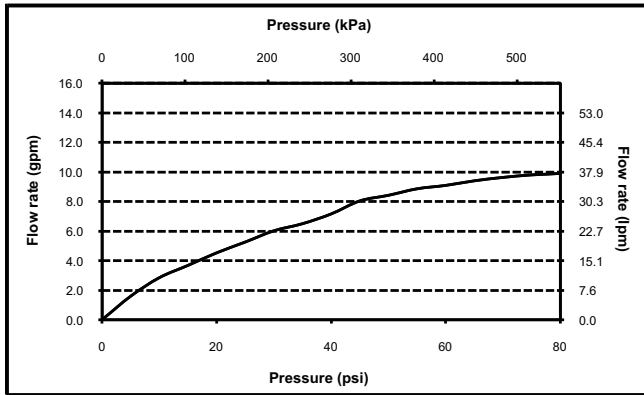

Valve shown with plaster guard in place

